



C.L-CNC-019

拼料机

突破传统工艺，为胶板拼接量身定制

功能

自动摩擦拼接眼镜架叶子料或桩头料，无须拼料水及其它附料，直接拼接。速度快，噪音低，稳定性强，拼接融合好，拼接面均匀。

优点

- 省时省人，无需拼料水，可直接拼合。
- 调机方便，翻单快捷。
- 环保、整洁。

Lamination machine


It breaks through the traditional process, and is custom-made for the acetate sheets splice.

Functions

It can realize the splicing of glasses acetate nose pad cutting or end_piece cutting, and realize the direct splicing without splicing water and other accessories. It has fast speed, low noise, strong stability and good fusion splicing. The splicing surface is even.

Advantages

- It can save time and labor, and realize the direct splicing without splicing water.
- The adjustment is convenient, and the cutting is fast.
- Environmentally-friendly and clean.

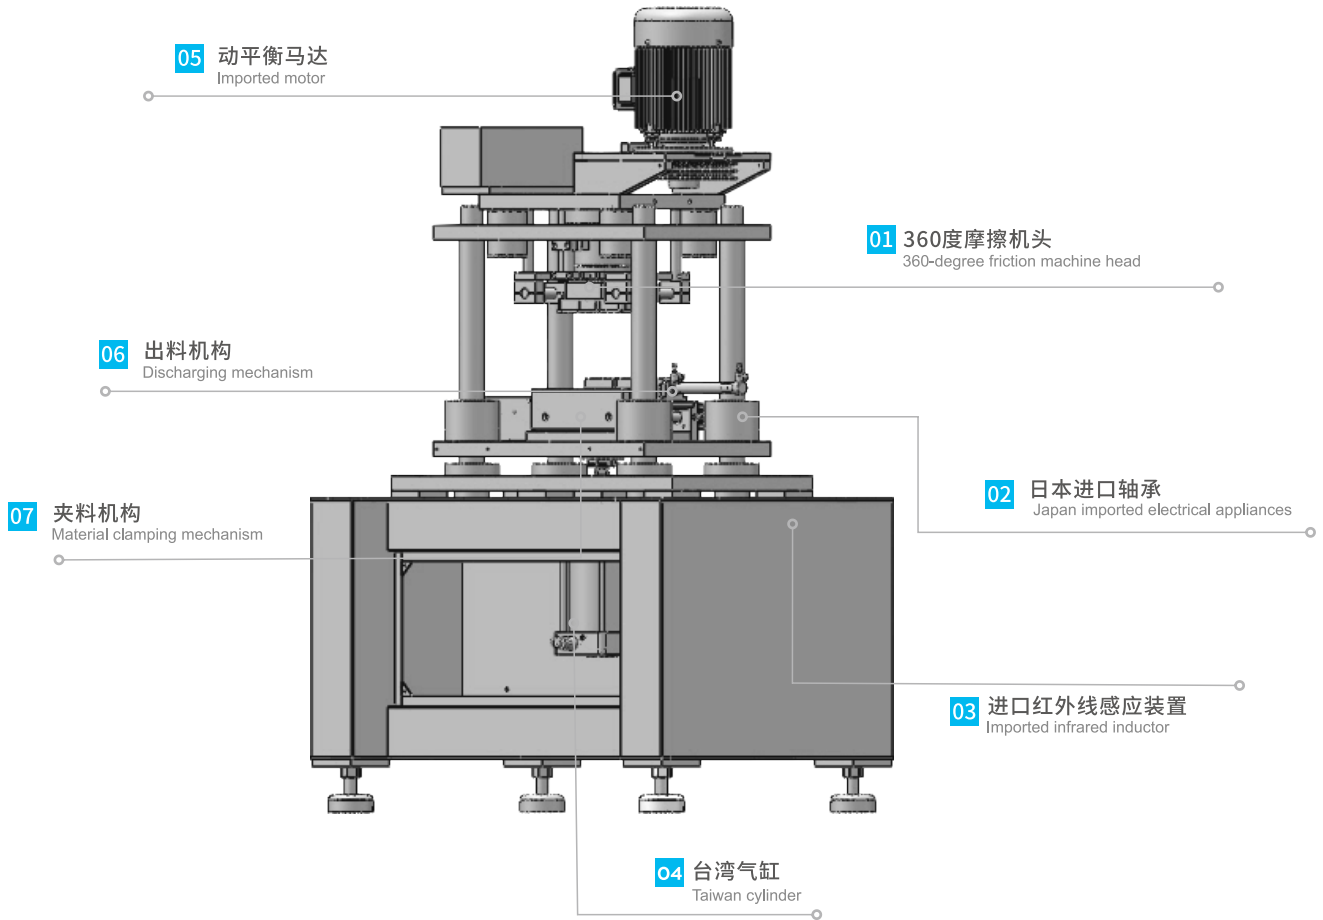

技术参数 / Technical Parameters

性能指标项 Performance index	标准值 standard value	工作频率 Operating frequency	600HZ
工作电压 Working voltage	380V/三相 80V/Three-phase	气源压力 Air pressure	0.6MPA
操作系统 Operating system	PLC人机界面 PLC man-machine interface	床体重量(KG) Machine tool weight(KG)	500KG
机床功率 Machine power	3KW	机床尺寸 Machine dimension	800*800*1650mm
工作噪音 Working noise	70DB	生产速度 Production speed	3幅/分钟 Three deputies/minute